




Spatial Resolution Characterization for AWiFS Multispectral Images

Slawomir Blonski, Robert E. Ryan, Mary Pagnutti
Science Systems and Applications, Inc.

Thomas Stanley
NASA, Stennis Space Center

Participation in this work by Science Systems and Applications, Inc., was supported by NASA at the John C. Stennis Space Center, Mississippi, under Task Order NNS04AB54T




MTF Analysis

Stennis Space Center

- Spatial resolution of the AWiFS multispectral images was characterized by estimating the value of the system Modulation Transfer Function (MTF) at the Nyquist spatial frequency.
- The Nyquist frequency is defined as half the sampling frequency, and the sampling frequency is equal to the inverse of the ground sample distance (GSD).
- The MTF was calculated from a ratio of the Fourier transform of a profile across an AWiFS image of the Lake Pontchartrain Causeway Bridge and the Fourier transform of a profile across an idealized model of the bridge.
- Magnitude of the ratio normalized to the zero-frequency value provides the final MTF.


$$MTF = \frac{| \text{FFT}(image) |}{| \text{FFT}(scene) |}$$



Target Selection

Stennis Space Center

- The Lake Pontchartrain Causeway was selected as a target in this characterization because:
 - it forms a long double bar target on a background of relatively dark and uniform water surface, and
 - a model profile of this target can be constructed.
- Direction of the bridge is also conveniently tilted from the pixel lines in the AWiFS images, and this tilt creates sub-sampling in the image of the bridge profile that allows for sub-pixel reconstruction of the spatial response.



"Pulse" Target

Stennis Space Center

*Lake Pontchartrain
Causeway Bridge on the
AWiFS image acquired on
January 16, 2005.*

*Product GSD: 56 m
Digitization: 10 bits
Resampling: CC*

*Spectral bands 4 Near Infrared
(NIR), 3 (Red), and 2 (Green)
are shown as the Red, Green,
Blue (RGB) colors, respectively.*

*Because of the presence of
suspended matter in Lake
Pontchartrain at the time of
the image acquisitions, the
water background was not as
uniform as expected. Analysis
was performed on only
uniform sections.*






"Pulse" Method

Stennis Space Center


AWiFS image is formed by convolution of the scene (bridges and shadows over water) with the point spread function (PSF).

*Double pulse target:
Lake Pontchartrain Causeway Bridge*

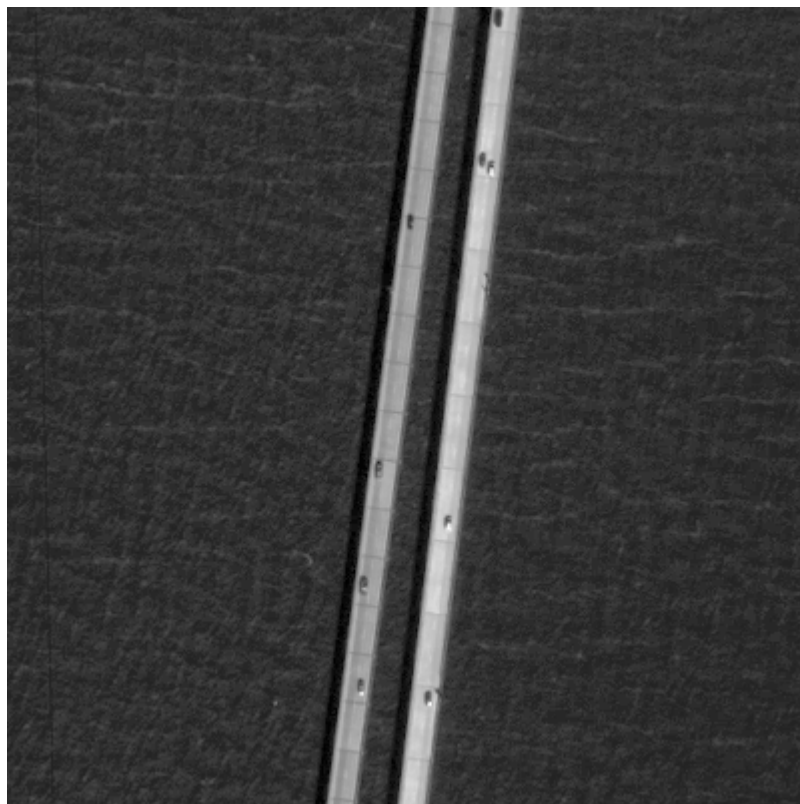

QuickBird panchromatic image, GSD 0.7 m

*AWiFS image of the Causeway
acquired on January 16, 2005*

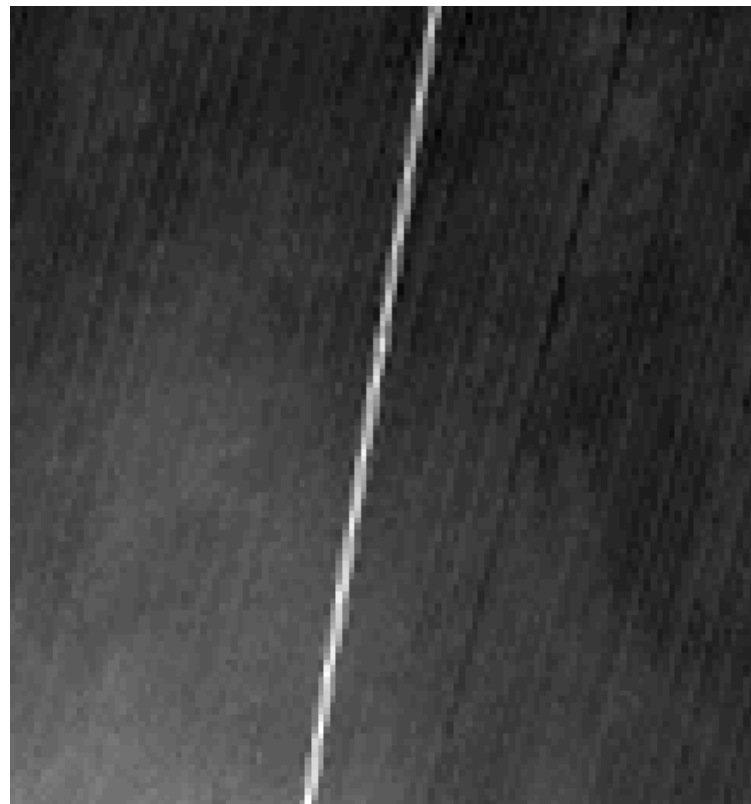


Band 3 (Red), GSD 56 m




Target Images

Stennis Space Center

January 16, 2005; Band 4 (NIR)

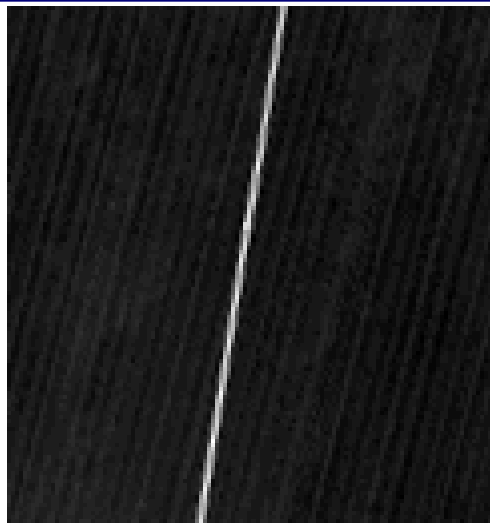


June 19, 2005; Band 4 (NIR)

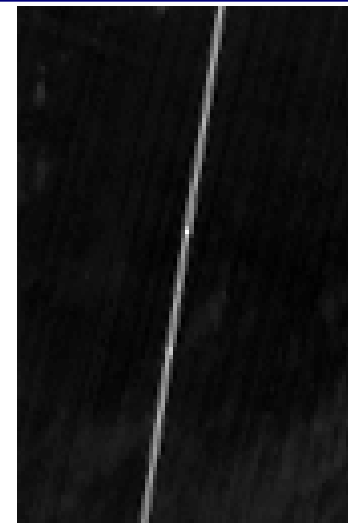

AWiFS images of the Lake Pontchartrain Causeway Bridge used in the MTF analysis

*Product GSD: 56 m
Digitization: 10 bits
Resampling: CC*


Because of the background non-uniformity created by the lake's suspended matter, the MTF analysis was conducted only for the infrared bands 4 and 5 (NIR & Short Wave Infrared (SWIR)).

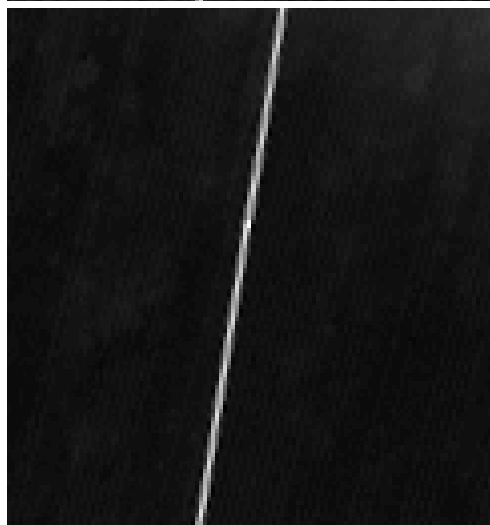

January 16, 2005; Band 5 (SWIR)




June 19, 2005; Band 5 (SWIR)



Bridge Profile

Stennis Space Center

The model of the bridge profile was created based on known dimensions of the Lake Pontchartrain Causeway Bridge and on measurements from the high-resolution imagery.

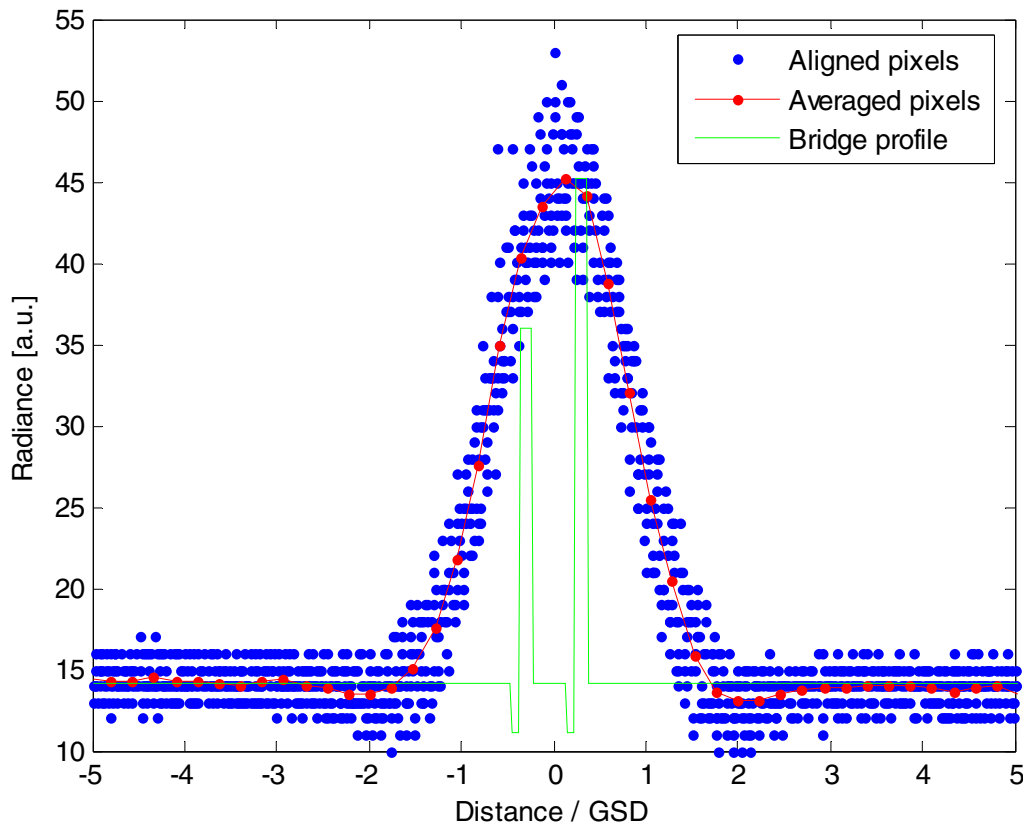



- In the first step of the analysis, the rows of image pixels were aligned to each other to remove the bridge tilt and create a bridge profile with multiple, sub-pixel sampling.
- Then, the pixels were aggregated over small, sub-pixel distance ranges to reduce noise in the measured bridge profile at a cost of decreasing spatial sampling.
- The aggregated bridge profile was subsequently Fourier transformed and divided by the transform of the model bridge profile.





Bridge Profiles

Stennis Space Center

Band 4 (NIR)

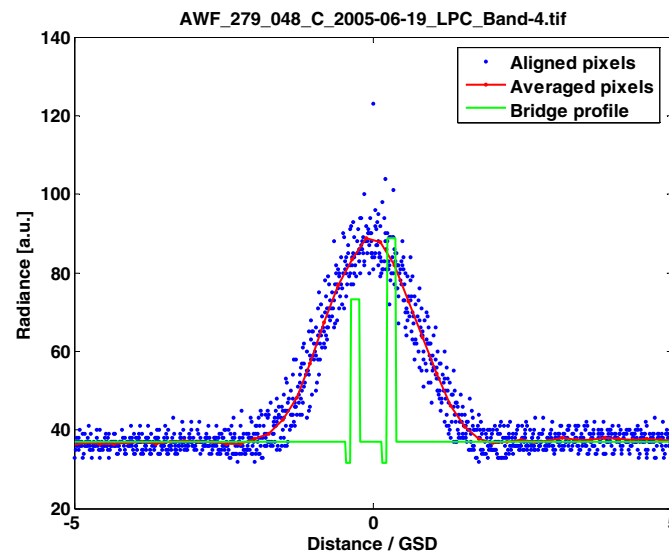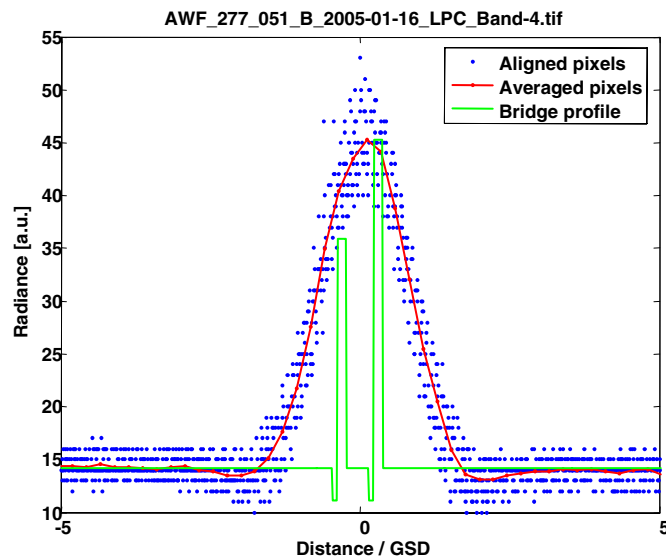


Band 5 (SWIR)

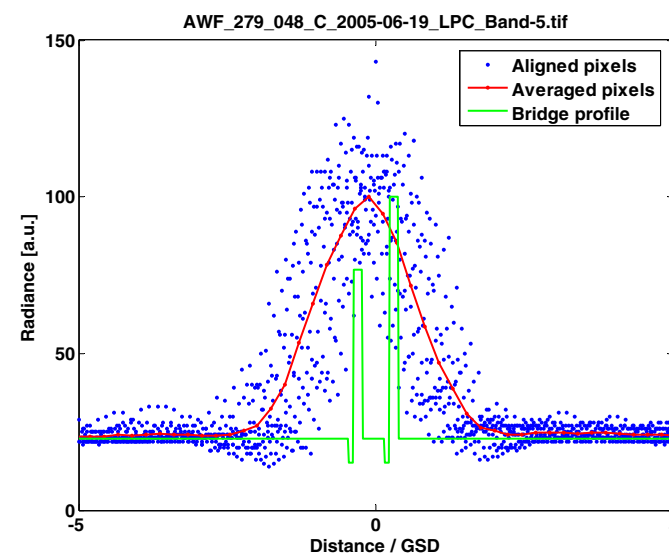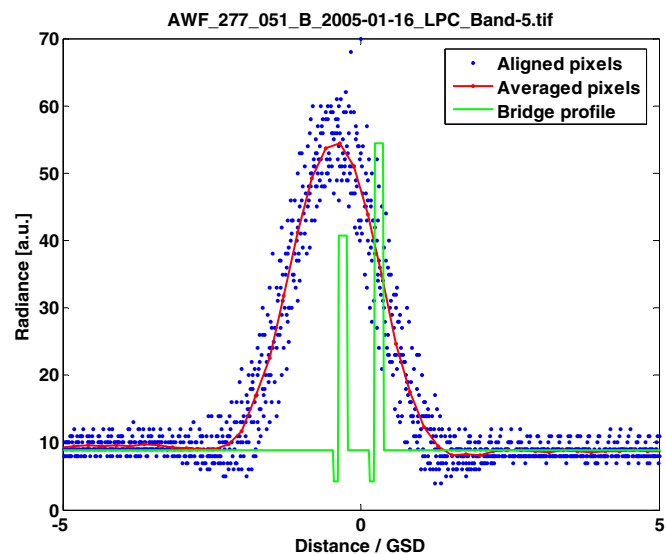

AWiFS-B Camera


AWiFS-A Camera



MTF Calculation

Stennis Space Center

As the image is formed by convolution of the scene with the system spatial response, and convolution is replaced with the product of Fourier transforms in the spatial frequency domain, MTF is calculated as a ratio of the transforms:

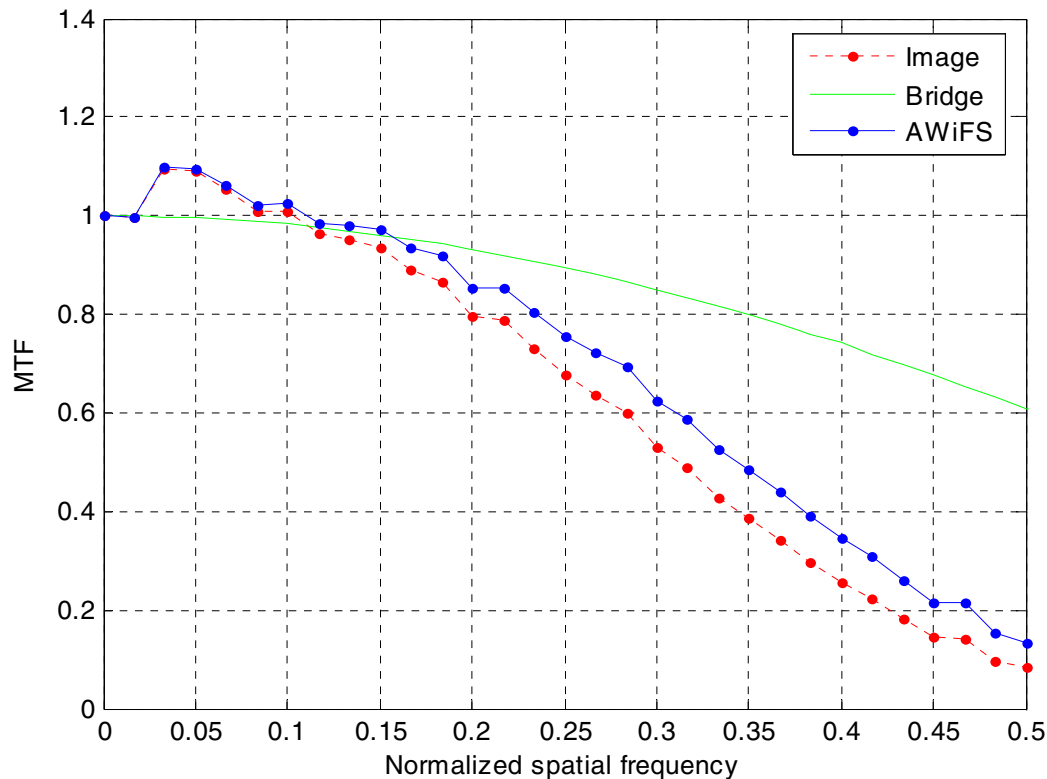

$$MTF = \frac{| \text{FFT}(image) |}{| \text{FFT}(scene) |}$$



*MTF ≈ 0.15
at Nyquist
frequency*





MTF Results

Stennis Space Center

Band 4 (NIR)

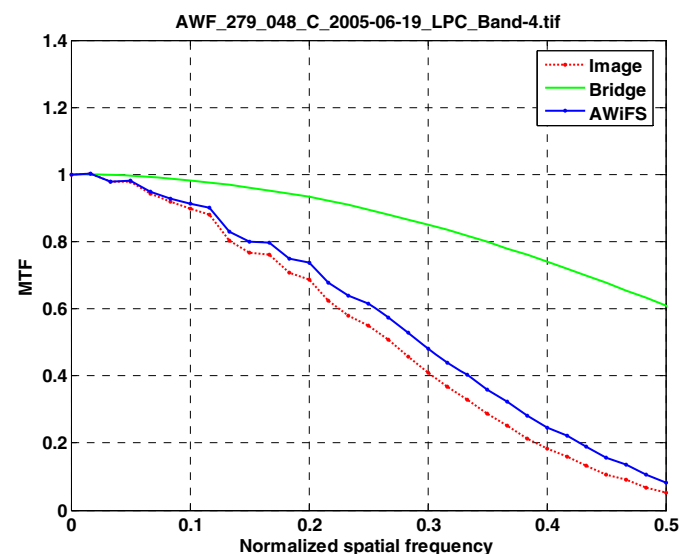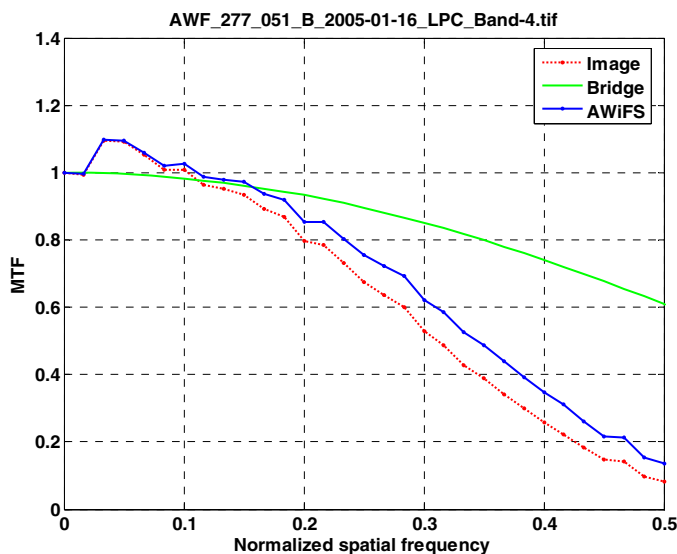

Band 5 (SWIR)

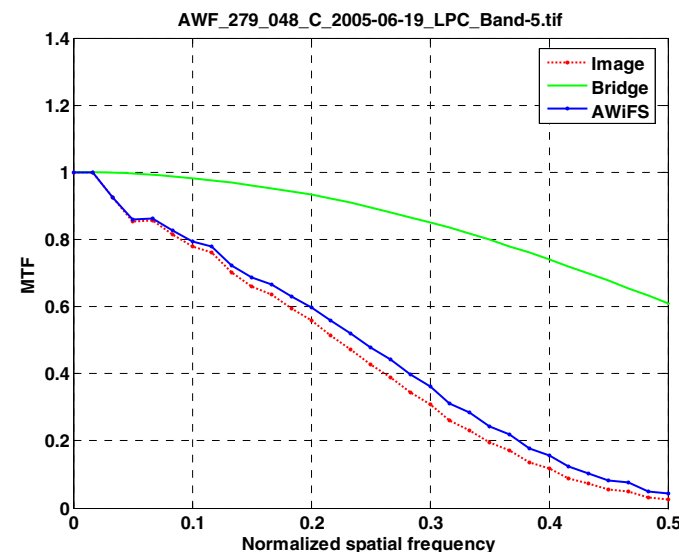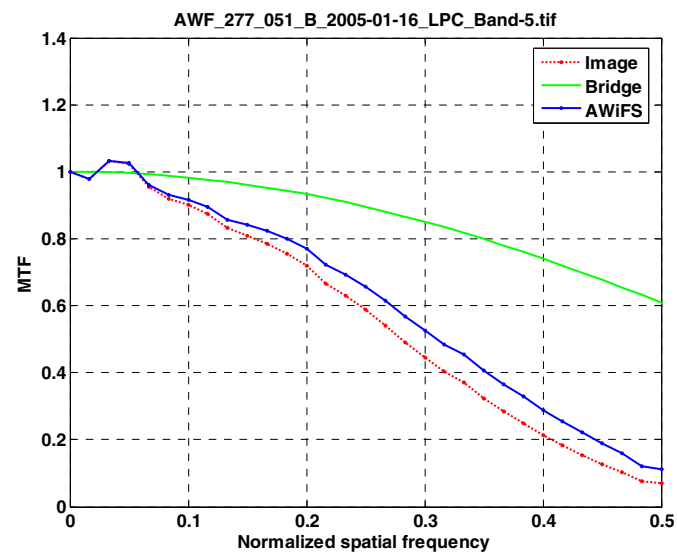

AWiFS-B Camera

AWiFS-A Camera



Results Summary

Stennis Space Center

- Estimates of MTF at Nyquist frequency:
 - AWiFS-A Camera
 - Band 4 (NIR): 0.10
 - Band 5 (SWIR): 0.05
 - AWiFS-B Camera
 - Band 4 (NIR): 0.15
 - Band 5 (SWIR): 0.10
- These values are for resampled images (using Cubic Convolution)
- Results only preliminary (single images)
 - More images need to be analyzed
 - Future plans: at least five images for each camera (across the field of view, too)
 - Improve bridge model (spectral reflectance, shadows)
 - Develop error budget (Monte Carlo simulations)

REPORT DOCUMENTATION PAGE					<i>Form Approved OMB No. 0704-0188</i>	
<p>The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.</p> <p>PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.</p>						
1. REPORT DATE (DD-MM-YYYY) 16-03-2006		2. REPORT TYPE Conference Presentation		3. DATES COVERED (From - To) Jan. 2005-March 2006		
4. TITLE AND SUBTITLE Spatial Resolution Characterization for AWiFS Multispectral Images				5a. CONTRACT NUMBER NASA Task Order NNS04AB54T		
				5b. GRANT NUMBER		
				5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S) Slawomir Blonski (1) Robert Ryan (1) Mary Pagnutti (1) Thomas Stanley (2)				5d. PROJECT NUMBER SWR C15C-JC15-00		
				5e. TASK NUMBER		
				5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) (1) Science Systems and Applications, Inc., Bldg. 1105, John C. Stennis Space Center, MS 39529 (2) Applied Research & Technology Project Office, Code PA30, Bldg. 1100, John C. Stennis Space Center, MS 39529				8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Applied Research & Technology Project Office, Code PA30, John C. Stennis Space Center, MS 39529				10. SPONSORING/MONITOR'S ACRONYM(S)		
				11. SPONSORING/MONITORING REPORT NUMBER SSTI-2220-0070 (R)		
12. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified/Publicly available STI per NASA Form 1676						
13. SUPPLEMENTARY NOTES Presentation for JACIE Civil Commercial Imagery Evaluation Workshop, March 14-16, 2006, U.S. Fish and Wildlife Service National Wildlife Visitors Center, Laurel, MD; sponsored by NASA/NGA/USGS; to be published in subsequent CD-ROM proceedings						
14. ABSTRACT Within the framework of the Joint Agency Commercial Imagery Evaluation program, the National Aeronautics and Space Administration, the National Geospatial-Intelligence Agency, and the U.S. Geological Survey cooperate in the characterization of high-to-moderate-resolution commercial imagery of mutual interest. One of the systems involved in this effort is the Advanced Wide Field Sensor (AWiFS) onboard the Indian Remote Sensing (IRS) Resourcesat-1 satellite, IRS-P6. Spatial resolution of the AWiFS multispectral images was characterized by estimating the value of the system Modulation Transfer Function (MTF) at the Nyquist spatial frequency. The Nyquist frequency is defined as half the sampling frequency, and the sampling frequency is equal to the inverse of the ground sample distance. The MTF was calculated as a ratio of the Fourier transform of a profile across an AWiFS image of the Lake Pontchartrain Causeway Bridge and the Fourier transform of a profile across an idealized model of the bridge for each spectral band evaluated. The mean MTF value for the AWiFS imagery evaluated was estimated to be 0.1.						
15. SUBJECT TERMS spatial resolution characterization, AWiFS, Lake Pontchartrain Causeway Bridge						
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON	
a. REPORT	b. ABSTRACT	c. THIS PAGE			Thomas Stanley	
U	U	U	UU	11	19b. TELEPHONE NUMBER (Include area code) (228) 688-7779	